

Pin nailer PNG-25 D300068

Product specification sheet



Technical Data	D200091
Trip mechanism	single shot
Air consumption per shot	0,3 l per shot
Type of staplers	Type PN
Length	15-25 mm mm
Wire diameter	0,64 mm
Magazine capacity (number of staplers)	102
Operating pressure	4-7 bar
Vibration value	1,3 m/s ²
Sound pressure level (LPA)	77 dB (A)
Sound power level (LWA)	90 dB (A)
Dimensions (WxDxH)	226x43x160 mm
Weight	0,95 kg


Product description

Fact Sheet

- Users: carpenters, interior designers
- Perfect for mounting of cornice profiles, ornaments, window bars
- Stapler left a pin without any blemish and don't require putty
- Extra light and handy housing
- Two stage trigger prevents accidental firing of staples
- Bottom loading magazine allows quick and easy reloading

Pin nailer PNG-25 D300068

Product specification sheet

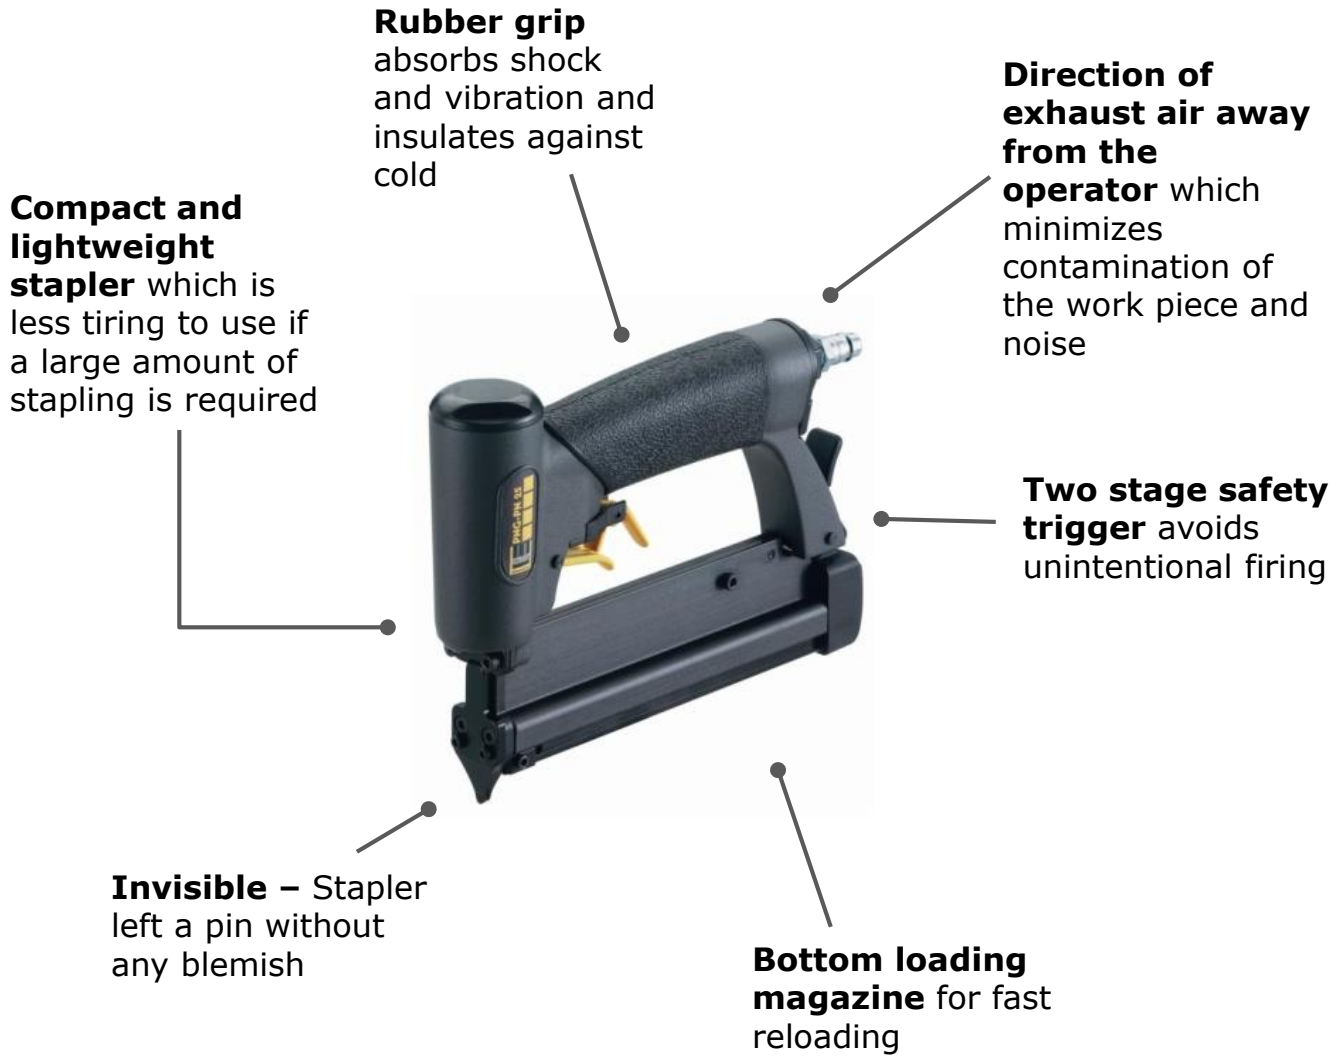

Further information

Scope of delivery	Delivered in Systainer, lubricant oil, hex wrench, goggles and instruction manual
Warranty	36 months when registered online 24 months for private (non-commercial) use 12 months for industrial use