

# UNM 360-8-40 WXSM Clean H342110

Product specification sheet



<b>Technical Data</b>	<b>H342110</b>
Air displacement	360 l/min
Max. free air delivery <sup>1)</sup>	225 l/min
Max. pressure	6/8 bar
Tank capacity	40 l
Voltage	230 Volt/50 Hz
Motor output	2,2 kW
Drive	1450 min <sup>-1</sup>
Noise level <sup>2)</sup>	53 dB(A)
Dimensions(WxDxH)	490 x 720 x 890 mm
Weight	106 Kg
Number of dental units	3-4

1) Max. free air delivery at 5 bar 2) LpA1 sound pressure level in accordance with DIN EN ISO 2151

# UNM 360-8-40 WXSM Clean H342110

Product specification sheet



## Oil free and clean

Premium oil free compressor with PTFE-coated pistons. No oil particles in compressed air and condensate.

## Very good running behaviour

An optimal air flow provides excellent cooling and outstanding low operating temperatures. This enables a high duty cycle up to 80%.

## Close monitoring of the effective running time

The mechanical operating hours counter provides a precise analysis for maintenance and service.

**Precise function** due to pressure regulator for controlling the air pressure perfectly

## Dry and clean compressed air

The mebrane dryer system provides the optimal purification of the compressed air.

## mobile


by swivel castors.

## Ready to use

All models are ready to be connected upon delivery.

## Certified as a medical product

in accordance with 93/42/EWG.

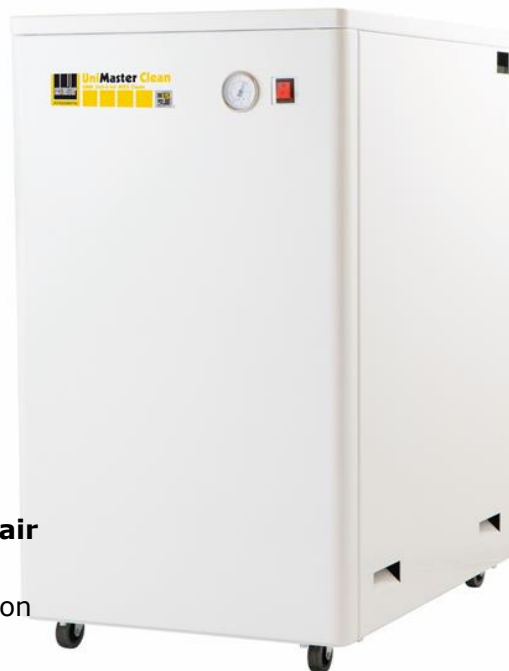

## Absolutely reliable

Low speed and premium components ensure a long lifetime.

## Extremely low-noise

With acoustic housing suitable for use directly next to the workplace.

## 15 years anti-corrosion warranty

on the compressed air tank due to inner powder coating