


# UNM STL 660-10-270 H815000

## Product Information Sheet

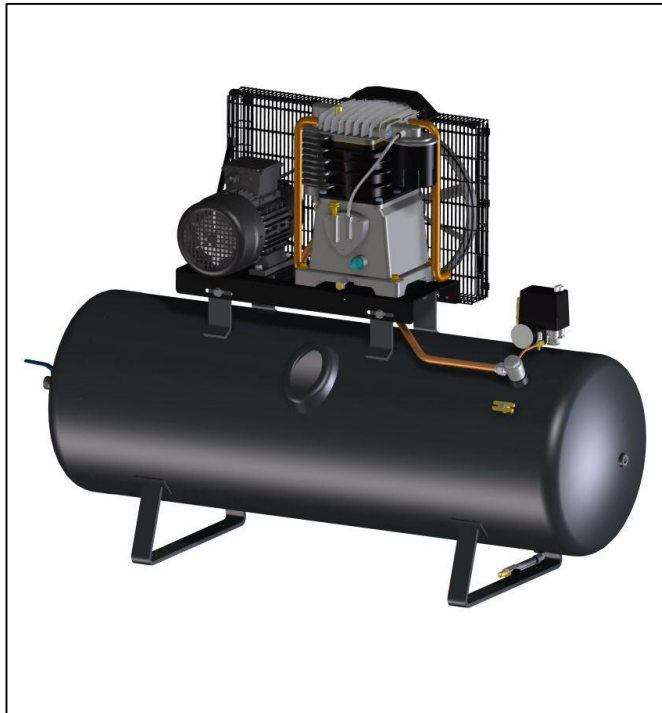

Technical data	H815000
Suction capacity	660 l/min
Eff. Delivery quantity	520 l/min
Start-up- / switch-off pressure	8/10 bar
Cylinder / Stages	2/2
Tank volume	270 l
Voltage	400 Volt/50 Hz
Drive power	4.0 kW
Speed	1025 min <sup>-1</sup>
Noise	78 dB(A)
Dimensions (WxDxH)	1620 x 515 x 1205 mm
Air outlet	¾"
Weight	174 kg

## Product Description

- Stationary compressor
- Compressor for work up to 10 bar
- Smooth running belt driven 2-cylinder unit with 2-stage compression
- Suitable for many jobs in the professional field
- Applications:  
Expansion of compressed air systems,  
Increase reliability
- Highest quality of installed components

# UNM STL 660-10-270 H815000

## Product Information Sheet



**Quiet running and optimal cooling**  
due to the new wedge-driven compressor unit with optimal cooling air flow and improved delivery performance

**Reduced noise level**  
Less noise from new unit

**Compressor with low speed of rotation**  
Reduced vibrations preserve the compressor components

**Long service life**  
guaranteed by 15-year warranty against rust-through of vessel

**Space-saving design**  
Small footprints thanks to optimal arrangement of the components

**Motionless standing position**  
Standard features include: anti vibration rubber feet

### Further information

Complete equipment	Pressure switch, motor protection, safety and check valve, container pressure gauge, unloaded start
Scope of delivery	Instruction manual
Warranty	- 12 months for professional industrial use - 24 months for private use only