

# UNM STS 1000-15-500 XDKC H863011

## Product Information Sheet




Technical data	H863011
Suction capacity	1000 l/min
Eff. Delivery quantity	790 l/min
Start-up- / switch-off pressure	13/15 bar
Cylinder / Stages	2/2
Tank volume	500 l
Voltage	400 Volt/50 Hz
Drive power	7.5 kW
Speed	995 min <sup>-1</sup>
Noise	82 dB(A)
Dimensions (WxDxH)	1145 x 850 x 2020mm
Air outlet	¾"
Weight	343 kg

## Product Description

- Stationary compressor with star-delta switch with integral motor protection and low voltage circuit breaker which ensure a high degree of operating safety
- Compressor for work up to 15 bar
- Smooth running belt driven 2-cylinder unit with 2-stage compression
- Suitable for many jobs in the professional field
- Applications:  
Expansion of compressed air systems,  
Increase reliability
- Highest quality of installed components
- With high performance cold dryer

# UNM STS 1000-15-500 XDKC H863011

## Product Information Sheet

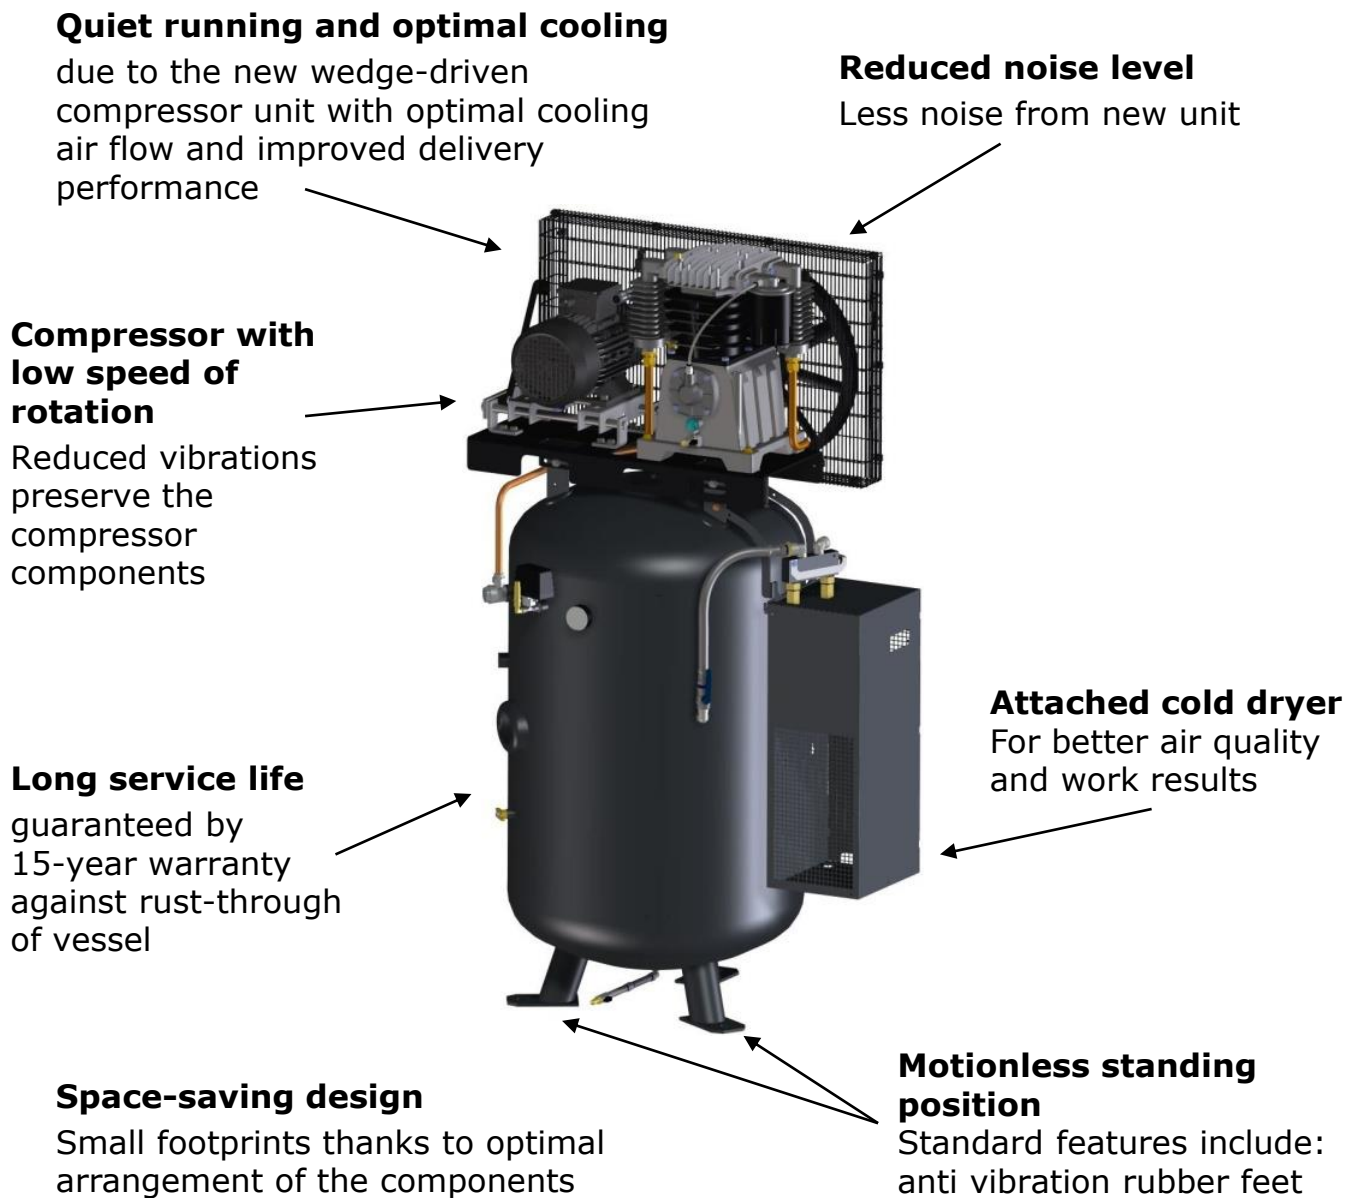

### Further information

Complete equipment	Pressure switch, motor protection, safety and check valve, container pressure gauge, unloaded start
Scope of delivery	Instruction manual
Warranty	- 12 months for professional industrial use - 24 months for private use only