

UNM STS 580-15-270 XDK H822010

Product Information Sheet




Technical data	H822010
Suction capacity	580 l/min
Eff. Delivery quantity	470 l/min
Start-up- / switch-off pressure	13/15 bar
Cylinder / Stages	2/2
Tank volume	270 l
Voltage	400 Volt/50 Hz
Drive power	4.0 kW
Speed	915 min ⁻¹
Noise	78 dB(A)
Dimensions (WxDxH)	945 x 705 x 1800mm
Air outlet	¾"
Weight	213 kg

Product Description

- Stationary compressor
- Compressor for work up to 15 bar
- Smooth running belt driven 2-cylinder unit with 2-stage compression
- Suitable for many jobs in the professional field
- Applications:
Expansion of compressed air systems,
Increase reliability
- Highest quality of installed components
- With high performance cold dryer

UNM STS 580-15-270 XDK H822010

Product Information Sheet

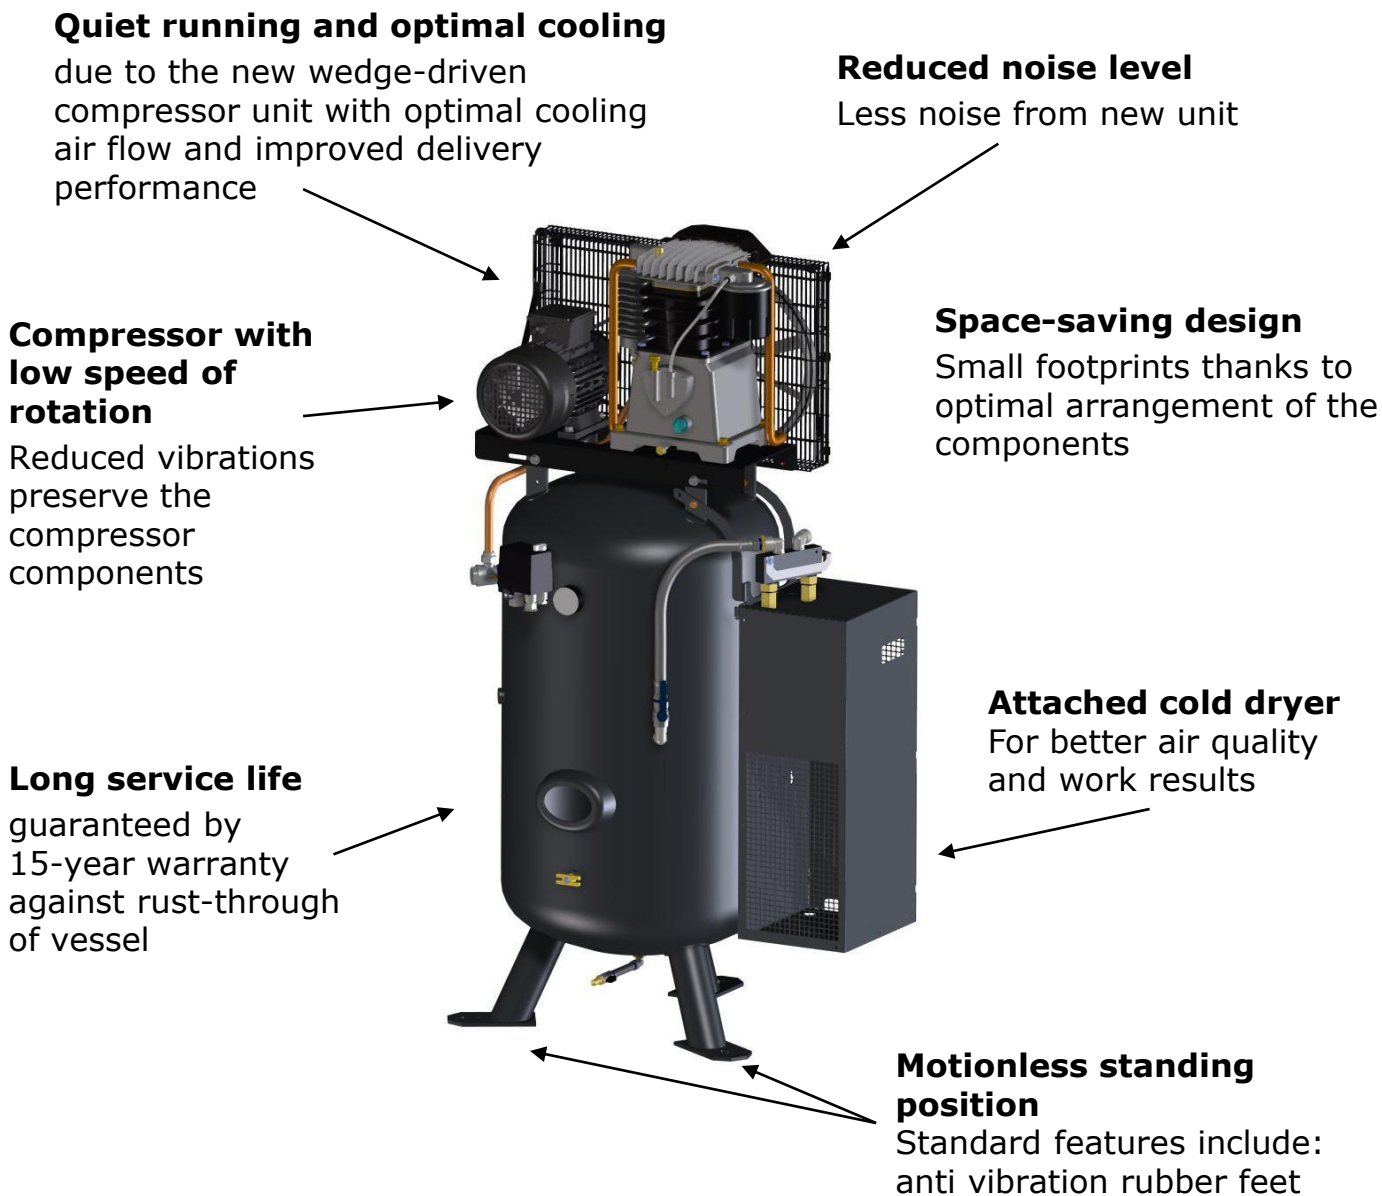

Further information

Complete equipment	Pressure switch, motor protection, safety and check valve, container pressure gauge, unloaded start
Scope of delivery	Instruction manual
Warranty	- 12 months for professional industrial use - 24 months for private use only