

UNM STL 780-15-500

1121580521 (No. old: H846000)

Product Information Sheet



Technical data	1121580521
Suction capacity	780 l/min
Eff. Delivery quantity	640 l/min
Start-up- / switch-off pressure	13/15 bar
Cylinder / Stages	2/2
Tank volume	500 l
Voltage	400 Volt/50 Hz
Drive power	5.5 kW
Speed	980 min ⁻¹
Noise	80 dB(A)
Dimensions (WxDxH)	1950 x 625 x 1380 mm
Air outlet	¾"
Weight	308 kg

Product Description

- Stationary compressor
- Compressor for work up to 15 bar
- Smooth running belt driven 2-cylinder unit with 2-stage compression
- Suitable for many jobs in the professional field
- Applications:
Expansion of compressed air systems,
Increase reliability
- Highest quality of installed components

UNM STL 780-15-500

1121580521 (No. old: H846000)

Product Information Sheet



Quiet running and optimal cooling

due to the new wedge-driven compressor unit with optimal cooling air flow and improved delivery performance

Reduced noise level

Less noise from new unit

Compressor with low speed of rotation

Reduced vibrations preserve the compressor components

Long service life


guaranteed by 15-year warranty against rust-through of vessel

Space-saving design

Small footprints thanks to optimal arrangement of the components

Motionless standing position

Standard features include: anti vibration rubber feet

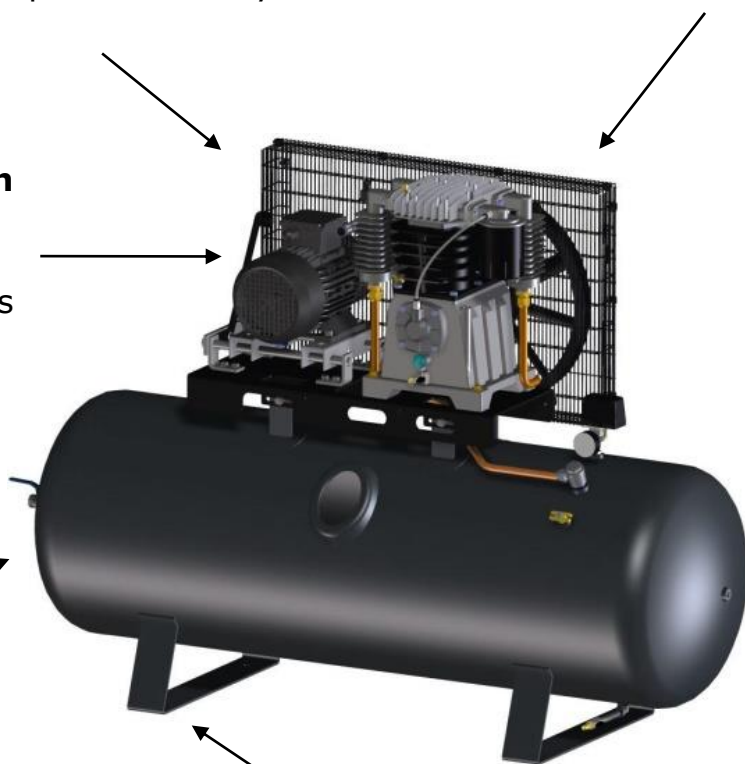

Further information

Complete equipment

Pressure switch, motor protection, safety and check valve, container pressure gauge, unloaded start

Scope of delivery

Instruction manual

Warranty

- 12 months for professional industrial use
- 24 months for private use only