


UNM STL 1250-10-270

H855000

Product Information Sheet

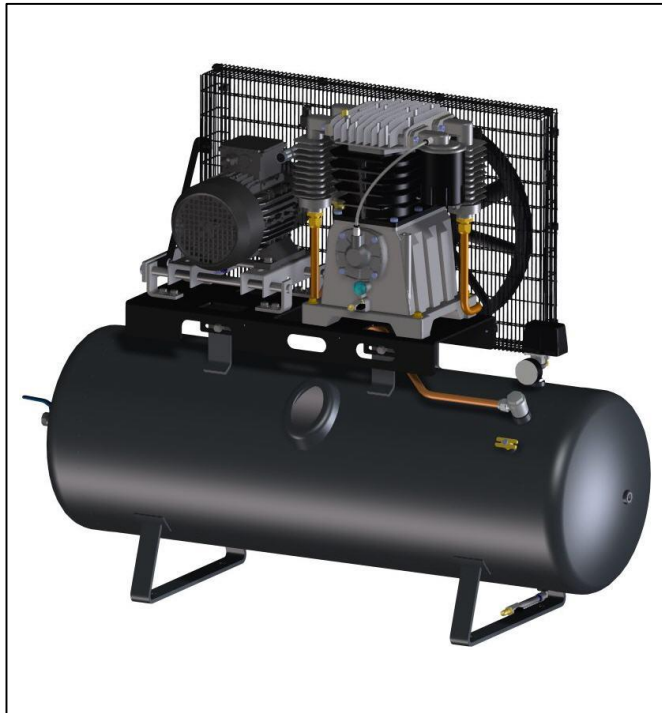

Technical data	H855000
Suction capacity	1250 l/min
Eff. Delivery quantity	980 l/min
Start-up- / switch-off pressure	8/10 bar
Cylinder / Stages	2/2
Tank volume	270 l
Voltage	400 Volt/50 Hz
Drive power	7.5 kW
Speed	1240 min ⁻¹
Noise	84 dB(A)
Dimensions (WxDxH)	1620 x 555 x 1285 mm
Air outlet	¾"
Weight	250 kg

Product Description

- Stationary compressor
- Compressor for work up to 10 bar
- Smooth running belt driven 2-cylinder unit with 2-stage compression
- Suitable for many jobs in the professional field
- Applications:
Expansion of compressed air systems,
Increase reliability
- Highest quality of installed components

UNM STL 1250-10-270 H855000

Product Information Sheet



Quiet running and optimal cooling
due to the new wedge-driven compressor unit with optimal cooling air flow and improved delivery performance

Reduced noise level
Less noise from new unit

Compressor with low speed of rotation
Reduced vibrations preserve the compressor components

Long service life
guaranteed by 15-year warranty against rust-through of vessel

Space-saving design
Small footprints thanks to optimal arrangement of the components

Motionless standing position
Standard features include: anti vibration rubber feet

Further information

Complete equipment	Pressure switch, motor protection, safety and check valve, container pressure gauge, unloaded start
Scope of delivery	Instruction manual
Warranty	- 12 months for professional industrial use - 24 months for private use only